

DATA UPDATE

21.11.24



   NITAS TESSILE
www.nitas-tessele.com

ROLLER BLINDS SYSTEM

| ระบบของม่านม้วน

No Cover Pipe | ม่านม้วนแบบไม่มีบังราง



Pipe 28 mm (Black/White)



Pipe 38 mm (Black/White)

With Cover Pipe | ม่านม้วนแบบมีบังราง



Pipe 28 mm (Black/White)



Pipe 38 mm (Black/White)

Pipe 38 mm

รางม่าน ความกว้างมาตรฐาน 1.80 เมตร สูง 2.20 เมตร
(ถ้าขนาดเกินมาตรฐาน กรุณาติดต่อสอบถามทางบริษัทฯ ก่อนสั่งซื้อสินค้า)

Pipe 28 mm

รางม่าน ความกว้างมาตรฐาน 1.50 เมตร สูง 1.80 เมตร
(ถ้าขนาดเกินมาตรฐาน กรุณาติดต่อสอบถามทางบริษัทฯ ก่อนสั่งซื้อสินค้า)

SPECIAL PIPE

I รางม่านม้วนแบบพิเศษ

รางขนาด 48 มิลลิเมตร และ 58 มิลลิเมตร ไม่มีรางบน,
บังรางทั้งสองแบบสามารถทำได้ เริ่มตั้งแต่ 1 เมตรขึ้นไป



Special Pipe 48 mm

รางกลมม่านม้วนแบบพิเศษ 48 มิลลิเมตร ไม่มีสปริงพ่อนแรง
สามารถใช้กับม่านม้วนระบบธรรมดา ความกว้าง 2.50 - 3.00 เมตร



Special Pipe 58 mm

รางกลมม่านม้วนแบบพิเศษ 58 มิลลิเมตร พร้อมสปริงพ่อนแรง
สามารถใช้กับม่านม้วนระบบธรรมดา ความกว้าง 3.50 - 4.50 เมตร

ROLLER BLINDS CHAIN

| โซ่ม่านม้วน

โซ่ม่านม้วนขนาดเส้นผ่านศูนย์กลาง 4.5 มิลลิเมตร

Plastic Chain



RC01 White



RC22 Black

Metal Chain



RC23 Stainless

BOTTOM RAIL

| รางถ่วงชายล่าง

รางถ่วงชายล่างมีให้เลือก 2 แบบ 2 สี



White Square
Bottom Rail



Black Square
Bottom Rail



White Round
Bottom Rail



Black Round
Bottom Rail

SPRING SYSTEM

I ระบบสปริงอ่อนแรงม่านม้วน

รายละเอียด	รุ่น T CLASS	รุ่น N CLASS	
	ชุดสปริงอ่อนแรง		ชุดสปริงล็อก กึ่งอัตโนมัติ
การทดแรง	ใช้ทดแรงขึ้น และลงของชุดม่านม้วน		ใช้งานโดยการดึงลง และดึงเก็บใบม่าน ด้วยการกระตุกลงเบาๆ ม่านม้วนจะเก็บขึ้นเอง
ความสูง	มากกว่า 4.5-5.0 เมตร	3.0-5.0 เมตร	ไม่เกิน 1.8 เมตร
ความกว้าง	ไม่เกิน 3 เมตร	ไม่เกิน 2.5 เมตร	1.0 - 1.8 เมตร
รางบน	มีรางบน	ไม่มีรางบน	

หมายเหตุ หากขนาดเกินจากนี้ กรุณาติดต่อสอบถามทางบริษัท

GUILD RAIL

| ระบบรางข้างกันแสง

คุณสมบัติพิเศษของม่านม้วนระบบรางข้าง

ใช้ประกอบด้านข้างซ้ายขวาของตัวม่านเพื่อเพิ่มความสวยงามเรียบร้อยให้กับม่านม้วน และยังช่วยเก็บแสงที่จะลอดเข้ามาจากด้านข้างของม่านม้วน เพิ่มความเป็นส่วนตัวและเก็บแสงได้มิดชิดยิ่งขึ้น อีกทั้งยังช่วยเก็บเสียงกระทบที่เกิดจากรางล่างม่านม้วนแคว่งตัวได้อีกด้วย

ประกอบด้วย

- รางข้าง ซ้าย/ขวา มีสีขาวและดำ
- เส้นสั๊กหลอดพิเศษเพื่อเก็บเสียงและเพิ่มความสิ้นโหลในการใช้งานม่านม้วน
- รางถ่วงชายผ้าแบบเหลี่ยมพิเศษ มีสีขาวและดำ

GUILD RAIL | รางข้าง



Black



White


BOTTOM RAIL | รางล่าง



Black



White




ผ้าสั๊กหลอดป้องกันการเสียดสี ขณะม่านม้วนเลื่อนขึ้นลง

MOTOR SYSTEM

| ระบบมอเตอร์

NT45

- มอเตอร์ม่านม้วนที่ดีที่สุด มาตรฐานของ Nitas Tessile
- รับน้ำหนักสูงสุดได้ถึง 65 กิโลกรัม
- รับประกันมอเตอร์นานสูงสุดถึง 5 ปี
- ระบบมอเตอร์ใช้ได้ทั้ง ม่านม้วน, ม่านม้วนหลังคา, กันสาด

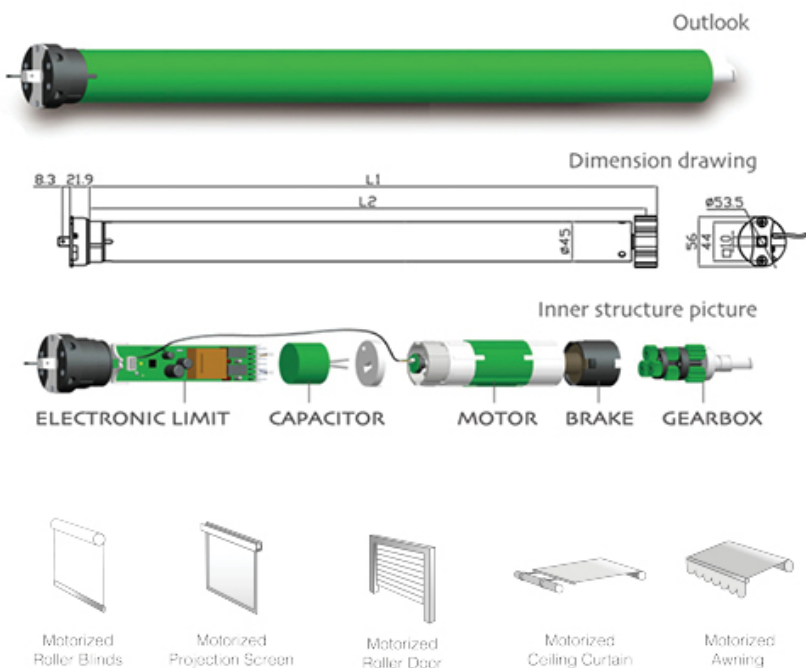

MOTOR DETAIL

| รายละเอียดมอเตอร์

รุ่น	NT45R-6/28	NT45E-20/26
แรงบิด	6 Nm	20 Nm
ความเร็ว	28 rpm	26 rpm
แรงดันไฟฟ้า	230 V	230 V
ความถี่	50 Hz	50 Hz
กำลังไฟฟ้า	121 W	145 W
รับน้ำหนักสูงสุด	20 kg	65 kg

หมายเหตุ ขาจับมอเตอร์รุ่นพิเศษระยะห่างระหว่างมอเตอร์เพียง 3.5 ซม. เท่านั้น

ระบบการควบคุม



รีโมทไร้สาย
15 ช่องสัญญาณ



สวิตช์ติดผนัง
15 ช่องสัญญาณ

หมายเหตุ ใช้รีซีฟเวอร์บีวอิน



MOTOR SYSTEM

| ระบบมอเตอร์

somfy®



SOMFY RTS 10/32

มอเตอร์ผ่านมาตรฐาน
Somfy รับประกันมอเตอร์
นานสูงสุดถึง 5 ปี



รุ่น	Somfy RTS 10/32
แรงบิด	10 Nm
ความเร็ว	32 rpm
แรงดันไฟฟ้า	230 V
ความถี่	50 Hz
กำลังไฟฟ้า	160 W
กระแสไฟฟ้าสูงสุด	0.75 A
น้ำหนัก	2.215 kg
การถ่ายเทความร้อน	150°C
ระดับเสียง	54 dBA
มาตรฐาน	EN 60335-2-97 EN 301489-3 EN 300220-3



WALL SWITCH
สวิตช์ติดผนัง



1 channel



4 channel



16 channel

WIRELESS REMOTE
รีโมทไร้สาย



BLACKOUT

ม่านม้วนทึบแสง



Design Code: **BB01 LONDON (J)**

Width : 200, 250, 300 cm
Content : 100% Polyester
Weight : 340 g/sqm (+5%)
Thickness : 0.34 mm (+5%)
Purpose : Blackout
Openness : 0%
Price : 1,200 Baht/sqyd
Standard : UV Protection | Printable

: **BB02 PARIS (JS)**

: 200, 250 cm
: 100% Polyester
: 250 g/sqm (+5%)
: 0.41 mm (+5%)
: Blackout
: 0%
: 1,200 Baht/sqyd
: UV Protection | Printable
Silver Coated

Design Code: **BB03 STOCKHOLM**

Width : 200, 260 cm
Content : 100% Polyester
Weight : 340 g/sqm (+5%)
Thickness : 0.55 mm (+5%)
Purpose : Blackout
Openness : 0%
Price : 1,200 Baht/sqyd
Standard : UV Protection | GREENGUARD
OEKO-TEK Standard 100

: **BB04 MADRID (MSW)**

: 240 cm
: 100% Polyester
: 305 g/sqm (+5%)
: 0.32 mm (+5%)
: Blackout
: 0%
: 1,200 Baht/sqyd
: UV Protection | Anti Fungal | GREENGUARD
OEKO-TEK Standard 100 | Silver Coated
Waterproof

Design Code: **BB05 ROME (JW)**

Width : 240 cm
Content : 100% Polyester
Weight : 310 g/sqm (+5%)
Thickness : 0.32 mm (+5%)
Purpose : Blackout
Openness : 0%
Price : 1,200 Baht/sqyd
Standard : UV Protection | GREENGUARD
OEKO-TEK Standard 100 | Printable
Waterproof

: **BB06 PRAGUE**

: 200, 250, 300 cm
: 70% PVC, 30% Polyester
: 550 g/sqm (+5%)
: 0.65 mm (+5%)
: Blackout
: 0%
: 2,100 Baht/sqyd
: UV Protection
Color Fastness: 4.5 (AATCC 16)

Design Code: BB07 BERLIN (F)

Width : 200, 280 cm
Content : 100% Polyester
Weight : 400 g/sqm (+5%)
Thickness : 0.68 mm (+5%)
Purpose : Blackout
Openness : 0%
Price : 1,200 Baht/sqyd
Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100

: BB08 ATHENS (MFJW)

: 200, 254 cm
: 75% PVC, 25% Fiberglass
: 500 g/sqm (+5%)
: 0.38 mm (+5%)
: Blackout
: 0%
: 1,200 Baht/sqyd
: UV Protection | Anti Fungal: ASTM G21
Flame Retardant: BS 5867-2 | GREENGUARD
OEKO-TEK Standard 100 | Printable | Waterproof

Design Code: BB09 MOSCOW

Width : 300 cm
Content : 100% Polyester
Weight : 370 g/sqm (+5%)
Thickness : 0.55 mm (+5%)
Purpose : Blackout
Openness : 0%
Price : 1,900 Baht/sqyd
Standard : UV Protection | GREENGUARD
OEKO-TEK Standard 100

: BB11 DUBLIN

: 280 cm
: 100% Polyester
: 375 g/sqm (+5%)
: 0.67 mm (+5%)
: Blackout
: 0%
: 1,200 Baht/sqyd
: UV Protection

Design Code: BB12 OSLO (BMF)

Width : 300 cm
Content : 100% Polyester
Weight : 370 g/sqm (+5%)
Thickness : 0.65 mm (+5%)
Purpose : Blackout
Openness : 0%
Price : 1,200 Baht/sqyd
Standard : UV Protection | Anti Bacterial: ASTM G22
Anti Fungal: ASTM G21
Flame Retardant: NFPA 701 | GREENGUARD

: BB13 LISBON (S)

: 280 cm
: 100% Polyester
: 240 g/sqm (+5%)
: 0.20 mm (+5%)
: Blackout
: 0%
: 1,200 Baht/sqyd
: UV Protection | Silver Coated

Design Code: BB14 BRUSSELS (S)

Width : 280 cm
Content : 100% Polyester
Weight : 260 g/sqm (+5%)
Thickness : 0.30 mm (+5%)
Purpose : Blackout
Openness : 0%
Price : 1,200 Baht/sqyd
Standard : UV Protection | Silver Coated

Design Code: **BB01 LONDON (J)**

Width : 200, 250, 300 cm

Content : 100% Polyester

Weight : 340 g/sqm ($\pm 5\%$)

Thickness : 0.34 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Printable



BB01-01 WHITE

BB01-05 GREEN

BB01-02 IVORY

BB01-06 DARK GREY

BB01-03 BEIGE

BB01-04 GREY

BB01-07 BLACK

Design Code: **BB02 PARIS (JS)**

Width : 200, 250 cm

Content : 100% Polyester

Weight : 250 g/sqm ($\pm 5\%$)


Thickness : 0.41 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Printable
Silver Coated



BB02-01 WHITE-SILVER

BB02-05 BLACK-SILVER

BB02-02 IVORY-SILVER

BB02-06 BROWN-SILVER

BB02-03 BEIGE-SILVER

BB02-04 GREY-SILVER

BB02-07 LIGHT OAK-SILVER

Design Code: **BB03 STOCKHOLM**

Width : 200, 260 cm

Content : 100% Polyester

Weight : 340 g/sqm ($\pm 5\%$)

Thickness : 0.55 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | GREENGUARD
OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



BB03-01 WHITE

BB03-02 BEIGE

BB03-03 GREY

BB03-04 BROWN

BB03-05 DARK GREY

Design Code: **BB04 MADRID (MSW)**

Width : 240 cm

Content : 100% Polyester

Weight : 305 g/sqm ($\pm 5\%$)

Thickness : 0.32 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Anti Fungal | GREENGUARD
OEKO-TEK Standard 100 | Silver Coated
Waterproof



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



BB04-01 WHITE-SILVER

BB04-02 BEIGE-SILVER

BB04-03 BLUE-SILVER

BB04-04 GREY-SILVER

Design Code: **BB05 ROME (JW)**

Width : 240 cm

Content : 100% Polyester

Weight : 310 g/sqm ($\pm 5\%$)

Thickness : 0.32 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | GREENGUARD
OEKO-TEK Standard 100 | Printable
Waterproof



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



BB05-01 WHITE-WHITE

BB05-02 BEIGE-BEIGE

BB05-03 GREY -GREY

BB05-04 BLUE

Design Code: **BB06 PRAGUE**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 550 g/sqm ($\pm 5\%$)

Thickness : 0.65 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 2,100 Baht/sqyd

Standard : UV Protection
Color Fastness: 4.5 (AATCC 16)



BB06-01 WHITE

BB06-02 BEIGE

BB06-03 GREY

Design Code: **BB07 BERLIN (F)**

Width : 200, 280 cm

Content : 100% Polyester

Weight : 400 g/sqm ($\pm 5\%$)

Thickness : 0.68 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



BB07-01 IVORY

BB07-02 CREAM

BB07-03 KHAKI

Design Code: **BB08 ATHENS (MFJW)**

Width : 200, 254 cm

Content : 75% PVC, 25% Fiberglass

Weight : 500 g/sqm ($\pm 5\%$)

Thickness : 0.38 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Anti Fungal: ASTM G21
Flame Retardant: BS 5867-2 | GREENGUARD
OEKO-TEK Standard 100 | Printable | Waterproof



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



BB08-01 WHITE-WHITE

BB08-02 CREAM-CREAM

BB08-03 GREY-GREY

BB08-04 IVORY-IVORY

BB08-05 LINEN-LINEN

BB08-06 DARK GREY

Design Code: **BB09 MOSCOW**

Width : 300 cm

Content : 100% Polyester

Weight : 370 g/sqm ($\pm 5\%$)

Thickness : 0.55 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,900 Baht/sqyd

Standard : UV Protection | GREENGUARD
OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



BB09-01 WHITE

BB09-02 BEIGE

BB09-03 BROWN

BB09-04 GREY

BB09-05 DARK GREY

Design Code: **BB11 DUBLIN**

Width : 280 cm

Content : 100% Polyester

Weight : 375 g/sqm ($\pm 5\%$)

Thickness : 0.67 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection



BB11-01 IVORY

BB11-02 BEIGE

Design Code: **BB12 OSLO (BMF)**

Width : 300 cm

Content : 100% Polyester

Weight : 370 g/sqm ($\pm 5\%$)

Thickness : 0.65 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Anti Bacterial: ASTM G22
Anti Fungal: ASTM G21
Flame Retardant: NFPA 701 | GREENGUARD



BB12-01 WHITE

BB12-02 CREAM

BB12-03 GREY

Design Code: **BB13 LISBON (S)**

Width : 280 cm

Content : 100% Polyester

Weight : 240 g/sqm ($\pm 5\%$)

Thickness : 0.20 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Silver Coated



BB13-01 WHITE-SILVER

BB13-02 CREAM-SILVER

BB13-03 GREY-SILVER

BB13-04 BEIGE-SILVER

BB13-05 BROWN-SILVER

BB13-06 DARK GREY-SILVER

Design Code: **BB14 BRUSSELS (S)**

Width : 280 cm

Content : 100% Polyester

Weight : 260 g/sqm ($\pm 5\%$)

Thickness : 0.30 mm ($\pm 5\%$)

Purpose : Blackout

Openness : 0%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Silver Coated



BB14-01 ALUMINIUM-SILVER

BB14-02 TITANIUM-SILVER

BB14-03 BRONZE-SILVER

BB14-04 NICKEL-SILVER

BB14-05 IRON-SILVER

SUNSCREENS

| ม่านบังนกรองแสง



Design Code: **S101 BANGKOK (F)**

Width : 200, 250 cm
Content : 73% PVC, 27% Polyester
Weight : 515 g/sqm (±5%)
Thickness : 0.71 mm (±5%)
Purpose : Sunscreens
Openness : 1%
Price : 2,100 Baht/sqyd
Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100

Design Code: **S102 TOKYO (F)**

Width : 200, 250, 300 cm
Content : 70% PVC, 30% Polyester
Weight : 470 g/sqm (±5%)
Thickness : 0.75 mm (±5%)
Purpose : Sunscreens
Openness : 1%
Price : 2,100 Baht/sqyd
Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100

Design Code: **S301 BEIJING (F)**

Width : 200, 250, 300 cm
Content : 70% PVC, 30% Polyester
Weight : 455 g/sqm (±5%)
Thickness : 0.67 mm (±5%)
Purpose : Sunscreens
Openness : 3%
Price : 1,200 Baht/sqyd
Standard : UV Protection | Color Fastness: 8 (ISO 105:B04)
Flame Retardant: NFPA 701 | GREENGUARD
OEKO-TEK Standard 100

Design Code: **S302 NEW DELHI (F)**

Width : 200, 250, 300 cm
Content : 70% PVC, 30% Polyester
Weight : 440 g/sqm (±5%)
Thickness : 0.65 mm (±5%)
Purpose : Sunscreens
Openness : 3%
Price : 1,900 Baht/sqyd
Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100

Design Code: **S501 MANILA (F)**

Width : 200, 250, 300 cm
Content : 70% PVC, 30% Polyester
Weight : 410 g/sqm (±5%)
Thickness : 0.55 mm (±5%)
Purpose : Sunscreens
Openness : 5%
Price : 1,200 Baht/sqyd
Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100

Design Code: **S502 HANOI (F)**

Width : 200, 250, 300 cm
Content : 70% PVC, 30% Polyester
Weight : 520 g/sqm (±5%)
Thickness : 0.75 mm (±5%)
Purpose : Sunscreens
Openness : 5%
Price : 1,200 Baht/sqyd
Standard : UV Protection | Color Fastness: 4.5 (AATCC 16)
Flame Retardant: NFPA 701 | GREENGUARD
OEKO-TEK Standard 100

SUNSCREENS

ม่านกันรังสีกาแสง



Design Code: **S503 JAKARTA (FS)**

Width : 200, 250, 300 cm
 Content : 70% PVC, 30% Polyester
 Weight : 550 g/sqm (±5%)
 Thickness : 0.65 mm (±5%)
 Purpose : Sunscreens
 Openness : 5%
 Price : 1,900 Baht/sqyd
 Standard : UV Protection | Color Fastness: 4.5 (AATCC 16)
 Flame Retardant: NFPA 701 | Silver Coated

: **S504 VIENTIANE (F)**

: 200, 250, 300 cm
 : 70% PVC, 30% Polyester
 : 428 g/sqm (±5%)
 : 0.73 mm (±5%)
 : Sunscreens
 : 5%
 : 1,200 Baht/sqyd
 : UV Protection | Color Fastness: 4.5(AATCC 16)
 Flame Retardant: NFPA 701 | GREENGUARD
 OEKO-TEK Standard 100

Design Code: **S505 SEOUL (F)**

Width : 200, 250, 300 cm
 Content : 70% PVC, 30% Polyester
 Weight : 520 g/sqm (±5%)
 Thickness : 0.68 mm (±5%)
 Purpose : Sunscreens
 Openness : 5%
 Price : 2,100 Baht/sqyd
 Standard : UV Protection | Flame Retardant: NFPA 701
 GREENGUARD | OEKO-TEK Standard 100

: **S506 YANGON (F)**

: 300 cm
 : 66% PVC, 18% Polyester, 16% Linen
 : 375 g/sqm (±5%)
 : 0.55 mm (±5%)
 : Sunscreens
 : 5%
 : 1,900 Baht/sqyd
 : UV Protection | Flame Retardant: NFPA 701
 GREENGUARD | OEKO-TEK Standard 100

Design Code: **S507 MALE (BMF)**

Width : 200, 300 cm
 Content : 70% PVC, 30% Polyester
 Weight : 409 g/sqm (±5%)
 Thickness : 0.70 mm (±5%)
 Purpose : Sunscreens
 Openness : 5%
 Price : 1,900 Baht/sqyd
 Standard : UV Protection | Anti Bacterial: ASTM G22
 Anti Fungal: ASTM G21
 Flame Retardant: NFPA 701 | GREENGUARD

: **S508 DOHA (BMF)**

: 200, 300 cm
 : 70% PVC, 30% Polyester
 : 518 g/sqm (±5%)
 : 0.66 mm (±5%)
 : Sunscreens
 : 5%
 : 1,900 Baht/sqyd
 : UV Protection | Anti Bacterial: ASTM G22
 Anti Fungal: ASTM G21
 Flame Retardant: NFPA 701 | GREENGUARD

Design Code: **S101 BANGKOK (F)**

Width : 200, 250 cm

Content : 73% PVC, 27% Polyester

Weight : 515 g/sqm ($\pm 5\%$)

Thickness : 0.71 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 1%

Price : 2,100 Baht/sqyd

Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



S101-01 WHITE

S101-02 GREY

S101-03 BEIGE

Design Code: **S102 TOKYO (F)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 470 g/sqm ($\pm 5\%$)

Thickness : 0.75 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 1%

Price : 2,100 Baht/sqyd

Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



S102-01 WHITE-WHITE

S102-02 WHITE-BEIGE

S102-03 WHITE-GREY

S102-04 BLACK-BROWN

S102-05 BLACK-GREY

S102-06 BLACK-BLACK

Design Code: **S301 BEIJING (F)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 455 g/sqm (±5%)

Thickness : 0.67 mm (±5%)

Purpose : Sunscreens

Openness : 3%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Color Fastness: 8 (ISO 105:B04)
Flame Retardant: NFPA 701 | GREENGUARD
OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



S301-01 WHITE

S301-02 BEIGE

S301-03 GREY

S301-04 BROWN

S301-05 BLACK

Design Code: **S302 NEW DELHI (F)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 440 g/sqm ($\pm 5\%$)

Thickness : 0.65 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 3%

Price : 1,900 Baht/sqyd

Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



S302-01 WHITE-WHITE

S302-05 GREY-GREY

S302-02 WHITE-BEIGE

S302-06 BLACK-BROWN

S302-03 WHITE-GREY

S302-07 BLACK-GREY

S302-04 BEIGE-BEIGE

S302-08 BLACK-BLACK

Design Code: **S501 MANILA (F)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 410 g/sqm ($\pm 5\%$)

Thickness : 0.55 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 5%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100



S501-01 WHITE WHITE

S501-06 BLACK GREY

S501-02 WHITE BEIGE

S501-07 BLACK BROWN

S501-03 WHITE GREY

S501-04 GREY GREY

S501-08 BLACK BLACK

Design Code: **S502 HANOI (F)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 520 g/sqm (±5%)

Thickness : 0.75 mm (±5%)

Purpose : Sunscreens

Openness : 5%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Color Fastness: 4.5 (AATCC 16)
Flame Retardant: NFPA 701 | GREENGUARD
OEKO-TEK Standard 100



OEKO-TEX®
STANDARD 100



S502-01 WHITE

S502-05 BLACK-WHITE

S502-02 WHITE-BEIGE

S502-06 BLACK-GREY

S502-03 WHITE-GREY

S5-02-07 BLACK-BROWN

S502-04 GREY-GREY

S502-08 BLACK

Design Code: **S503 JAKARTA (FS)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 550 g/sqm ($\pm 5\%$)

Thickness : 0.65 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 5%

Price : 1,900 Baht/sqyd

Standard : UV Protection | Color Fastness: 4.5 (AATCC 16)
Flame Retardant: NFPA 701 | Silver Coated



S503-01 WHITE-SILVER

S503-02 BEIGE-SILVER

S503-03 GREY-SILVER

Design Code: **S504 VIENTIANE (F)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 428 g/sqm (±5%)

Thickness : 0.73 mm (±5%)

Purpose : Sunscreens

Openness : 5%

Price : 1,200 Baht/sqyd

Standard : UV Protection | Color Fastness: 4.5(AATCC 16)
Flame Retardant: NFPA 701 | GREENGUARD
OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



S504-01 BEIGE

S504-05 BLUE

S504-02 LIGHT GREY

S504-06 BROWN

S504-03 GREY

S504-04 DARK GREY

S504-07 KHAKI

Design Code: **S505 SEOUL (F)**

Width : 200, 250, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 520 g/sqm (±5%)

Thickness : 0.68 mm (±5%)

Purpose : Sunscreens

Openness : 5%

Price : 2,100 Baht/sqyd

Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



S505-01 WHITE

S505-02 LIGHT GREY

S505-03 GREY

S505-04 BROWN

S505-05 BLACK

Design Code: **S506 YANGON (F)**

Width : 300 cm

Content : 66% PVC, 18% Polyester, 16% Linen

Weight : 375 g/sqm ($\pm 5\%$)

Thickness : 0.55 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 5%

Price : 1,900 Baht/sqyd

Standard : UV Protection | Flame Retardant: NFPA 701
GREENGUARD | OEKO-TEK Standard 100



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100 



S506-01 LINEN

S506-02 BEIGE

S506-03 LIGHT BROWN

Design Code: **S507 MALE (BMF)**

Width : 200, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 409 g/sqm ($\pm 5\%$)

Thickness : 0.70 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 5%

Price : 1,900 Baht/sqyd

Standard : UV Protection | Anti Bacterial: ASTM G22
Anti Fungal: ASTM G21
Flame Retardant: NFPA 701 | GREENGUARD



S507-01 IVORY

S507-02 CREAM

S507-03 LIGHT GREY

Design Code: **S508 DOHA (BMF)**

Width : 200, 300 cm

Content : 70% PVC, 30% Polyester

Weight : 518 g/sqm ($\pm 5\%$)

Thickness : 0.66 mm ($\pm 5\%$)

Purpose : Sunscreens

Openness : 5%

Price : 1,900 Baht/sqyd

Standard : UV Protection | Anti Bacterial: ASTM G22
Anti Fungal: ASTM G21
Flame Retardant: NFPA 701 | GREENGUARD



S508-01 IVORY

S508-02 CREAM

S508-03 LIGHT GREY

บริษัท นิตัส เทกซ์ไทล์ จำกัด

NITAS TESSILE

   **NitasTessile**
www.nitas-tessile.com